


Ball Screw Support Bearings

TAU Series



Nomenclature of Bearing Numbers

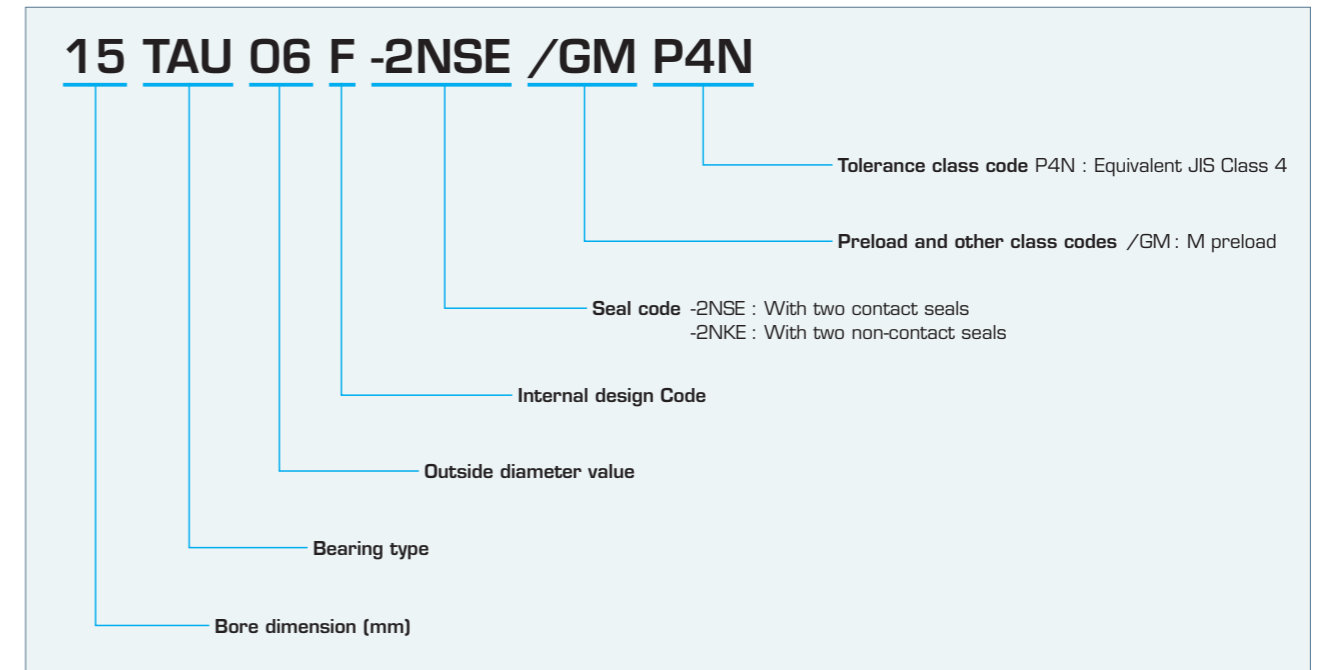

Features

- Perimeter structures combined in housing and outer ring integrated to improve maintainability, and form is more compact.
- Re-greasing when needed is possible through grease port.
- Contact seal is standard with high grade grease retention and intrusion protection.

Contact Angle

- The contact angle is 60°.

Cage

- A ball guide polyamide resin cage is provided as standard. The polyamide resin cage should be used under temperatures lower than 120°.

Accuracy

- Equivalent JIS Class 4 is standard. See page 13 for details.

Preload

- M preload as standard. See page 23 for details.